




### 6. Monitoring - 4 Watch Window

I/O monitoring of the addresses specified in Watch Window is executed.

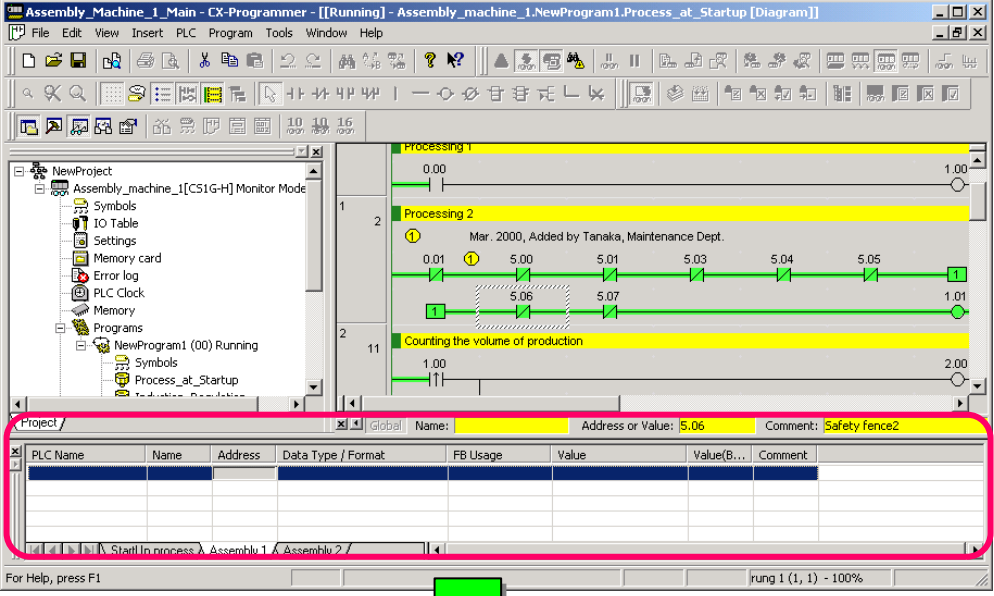

Display Watch Window.

Alt + 3



Enter a bit number that you want to monitor.

400






ENT


Press the ENT key..... continuously for auto increment of addresses.



ENT  
ENT  
ENT

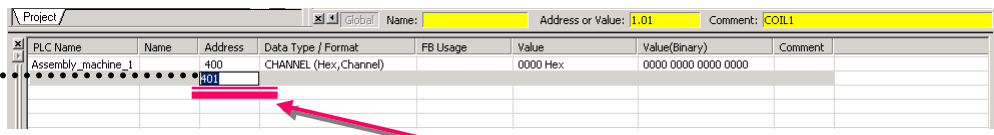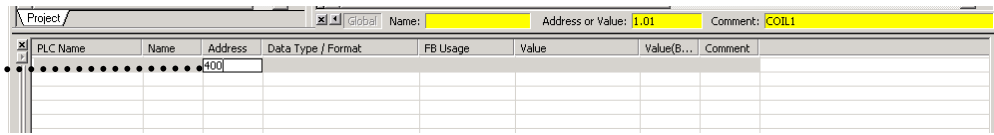

You can also enter a given address in this status.

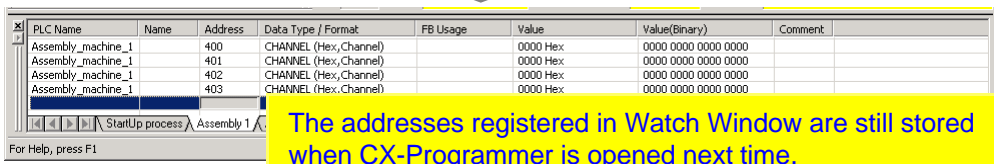


The addresses registered in Watch Window are still stored when CX-Programmer is opened next time.

Entry of BOOL type (contact)

Example: Entry of 4CH 00Bit

Enter "." (period) between CH and Bit.



Or enter "400" without a period in the "Name or address" box and then specify "BOOL" in the "Data Type/Format" box (Reverse the box and then press B key form the keyboard.)